


259.00 EUR
incl. 19% VAT, plus [shipping](#)

- J6412 !
- 6x USB !
- Power Onboard !
- Thin miniITX !

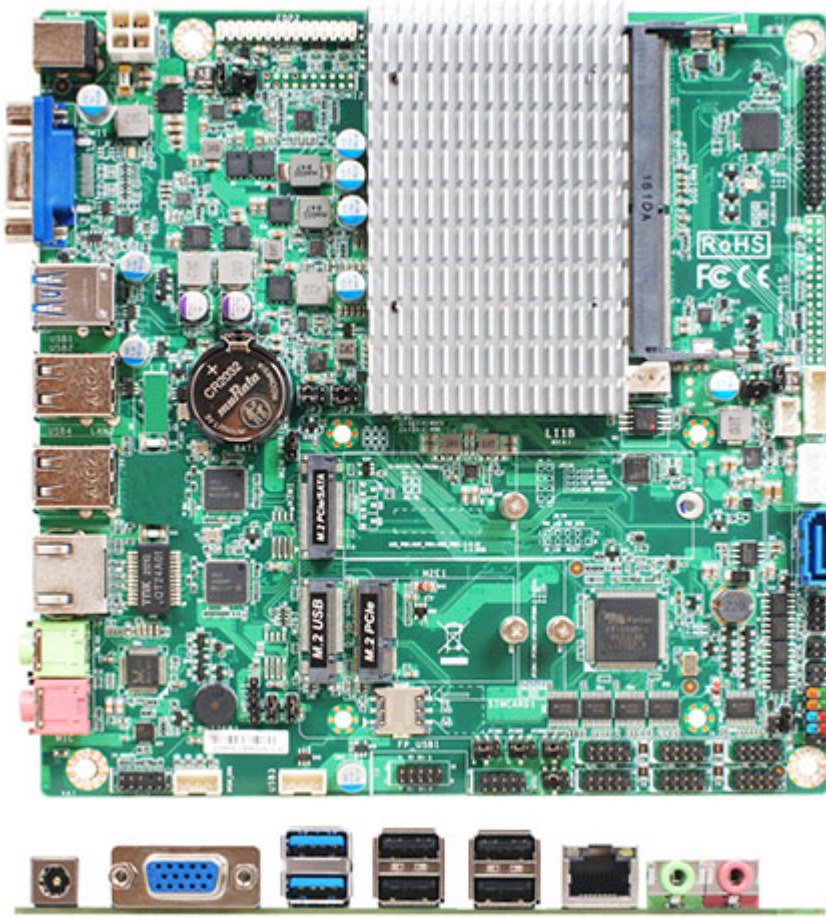

Support:  [Datasheet](#)

- Intel® Elkhart Lake J6412 2.0GHz/QC Core MCP Processor (Turbo 2.6GHz)
- 1* DDR4 3200MHz up to 32GB
- Realtek HD Audio
- 1* Intel® i225V 2.5GbE
- 1* SATAIII, 1* M.2 (M-key)
- 1* VGA, 1* eDP, 1* LVDS
- 2* RS232/422/485, 4* RS232, 2* USB3.1 (Gen. 1), 7* USB2.0
- 1* M.2 E key Support WIFI/BT Module , 1* M.2 B key Support 4G/5G Module
- 12V DC-in
- Thin MINI ITX Form Factor (170 *170 mm)

| | |
|------------------|---|
| Model | – JLI1BV-00 – JLIBV-002 (TPM2.0) |
| Form Factor | – ITX (170 * 170mm) |
| Processor System | – Intel® Elkhart lake J6412 Quad Core MCP SoC Processor – JLI1BV-00 (Quad Core 2.0GHz/10W, Turbo 2.6GHz) – AMI 128M Flash ROM |
| Memory | – 1* DDR4 3200MHz SO-DIMM up to 32GB |
| Storage | – 1* SATAIII (6.0 Gb/s) – 1* M.2 M-key (2242/2280, SATA or NVMe- PCIe x2) |

| | |
|----------------|---|
| Expansion | <ul style="list-style-type: none"> - 1* M.2 E-key (2230, support WIFI/BT Module) - 1* M.2 B-key (3042/3052, support 4G/5G Module) - 1* Nano SIM card slot |
| Ethernet | <ul style="list-style-type: none"> - 1* Intel® i225V 2.5GbE |
| Graphics | <ul style="list-style-type: none"> - Intel® HD Graphics, shared memory - 1* VGA (Max Resolution: 2560x1600@60Hz, Co-lay HDMI) - 1* LVDS (Max Resolution: 2560x1600@60Hz, Co-lay eDP) - 1* eDP (Max Resolution: 4096x2304@60Hz, Co-lay HDMI) - Support Triple Displays |
| Audio | <ul style="list-style-type: none"> - Realtek HD Audio - 3W Speaker Amplifier |
| Watchdog Timer | <ul style="list-style-type: none"> - From Super I/O to drag RESETCON# - 256 segments (10sec ~ 255min) |
| Internal I/O | <ul style="list-style-type: none"> - 3* USB2.0 - 2* RS232/422/485 - 4* RS232 - 1* SATAIII, 1* SATA Power - 3* M.2 (M key + E key + B key) - 1* GPIO (8 bit, 5V) - 1* AT mode - 1* I2C/SMBUS - 1* FP_ Audio - 1* Speaker - 1* TPM2.0 (Option) - 1* CPU FAN |
| External I/O | <ul style="list-style-type: none"> - 1* VGA - 1* RJ45 - 2* USB3.1 (Gen. 1) - 4* USB2.0 - Line-out - MIC - 12V DC-in |
| Power | <p>12V DC-in, AT/ATX Supported</p> <ul style="list-style-type: none"> - AT: Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready |
| Compliance | <ul style="list-style-type: none"> - CE, FCC, RoHS, REACH |
| Temperature | <ul style="list-style-type: none"> - Operating: 0°C ~ 60°C - Storage: -20°C ~ 70°C - Humidity: 10% ~ 90% RH @40°C (non-condensing) |
| OS Support | <ul style="list-style-type: none"> - Windows 10, Linux |